






# Product Specifications

## Powerex Precharged MH-AAAP100 AAA

### Industry Standard Dimensions

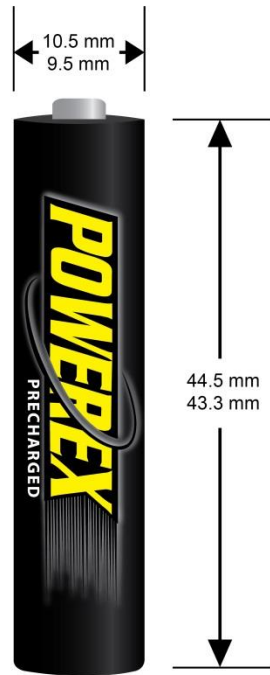

### Typical Characteristics

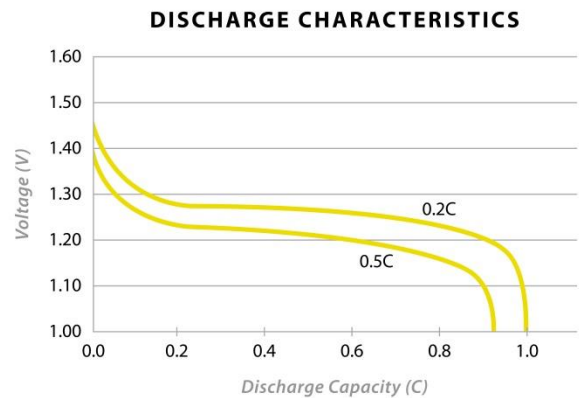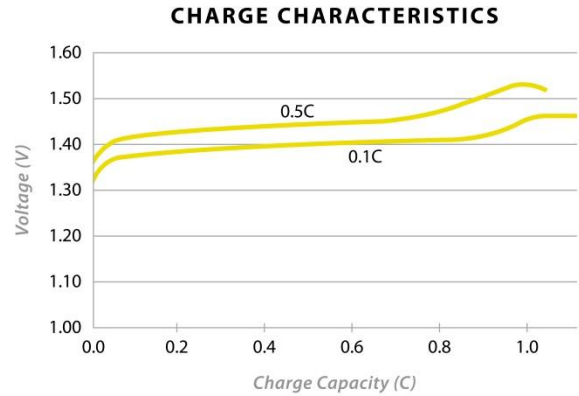

### Specifications

<b>Type:</b>	Nickel-Metal Hydride (NiMH) Rechargeable Battery
<b>Size:</b>	AAA
<b>Nominal Voltage:</b>	1.2 Volts
<b>Rated Capacity<sup>1</sup>:</b>	1000mAh
<b>Minimum Capacity:</b>	900mAh
<b>Internal Impedance<sup>2</sup>:</b>	~35mΩ
<b>Weight:</b>	13.0 grams
<b>Size:</b>	10.5 (D) x 44.5 (H) mm

### Operating and Storage Temperatures

<b>Charge:</b>	0 - 45°C
<b>Discharge:</b>	-20 - 50°C
<b>Storage:</b>	-20 - 50°C (<30 days) -20 - 40°C (<90 days) -20 - 30°C (<365 days)
<b>Humidity:</b>	65 ± 20%

This data is subject to change. Performance information is typical. Please Contact Maha Energy for more information.

1. Based on a 0.2C rate discharge to 1.0 volts
2. Internal Impedance measured after discharge at end voltage of 1.0 volts