

LC-R124R5P




Contents indicated (including the recycle marking, etc.) are subject to change without notice.

For main and standby power supplies.

Expected trickle design life: 6 – 9 years at 20 °C according to Eurobat.

Dimensions (mm)

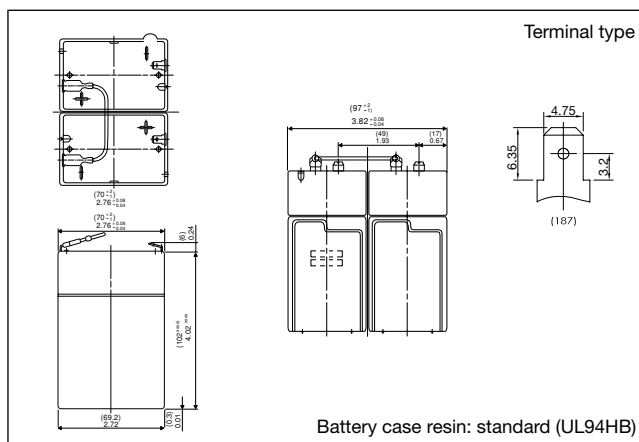


Specifications

Nominal voltage		12 V
Nominal capacity (20 hour rate)		4.5 Ah
Dimensions	Length	70 mm
	Width	97 mm
	Height	102 mm
	Total Height	108 mm
Approx. mass		1.45 kg
Terminal		Faston 187

Characteristics

Capacity (25 °C)	20 hour rate 10 hour rate 5 hour rate 1 hour rate	4.5 Ah 3.9 Ah 3.5 Ah 2.8 Ah
Internal resistance	Fully charged battery (25 °C)	40 mΩ
Temperature dependency of capacity (20 hour rate)	40 °C 25 °C 0 °C -15 °C	102 % 100 % 85 % 65 %
Self discharge (25 °C)	After 3 months After 6 months After 12 months	91 % 83 % 66 %

Duration of discharge vs Discharge current

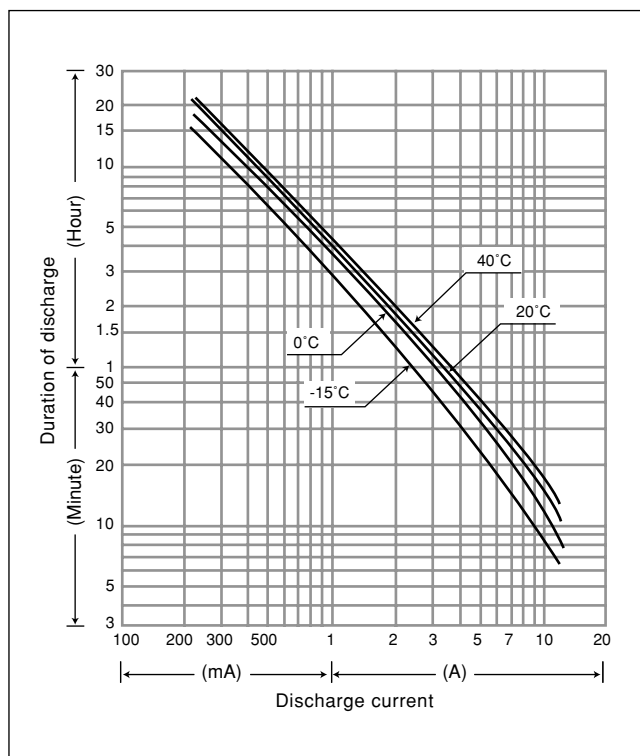

Watt Table

Cut-off V	3 min	5 min	10 min	15 min	20 min	30 min	45 min	1 h	1.5 h	2 h	3 h	4 h	5 h	6 h	10 h	20 h	24 h
9.6 V	270	214	139.4	106.4	89.2	66.6	47	37.6	25.8	19.98	14.88	11.42	9.44	7.58	5.02	2.72	2.272
9.9 V	250	200	136.6	105.6	87.8	65.8	46.6	37.6	25.4	19.84	14.8	11.36	9.36	7.56	5	2.72	2.266
10.2 V	232	188	133	103.6	86.2	65	46.2	36.8	24.8	19.32	14.66	11.28	9.28	7.5	4.96	2.7	2.258
10.5 V	206	168	123.2	96.4	82	63.6	45.4	36	24.2	18.64	14.42	11.2	9.2	7.4	4.92	2.7	2.25
10.8 V	174	148	110	89.8	79.8	61.4	44.8	35.4	23.6	17.76	14.14	11.06	8.98	7.28	4.88	2.68	2.236

Ampere Table

Cut-off V	3 min	5 min	10 min	15 min	20 min	30 min	45 min	1 h	1.5 h	2 h	3 h	4 h	5 h	6 h	10 h	20 h	24 h
9.6 V	24.3	19.13	12.44	9.25	7.69	5.69	4.00	3.19	2.19	1.69	1.25	0.956	0.788	0.633	0.419	0.227	0.189
9.9 V	22.6	17.94	12.19	9.19	7.56	5.63	3.98	3.19	2.14	1.68	1.24	0.950	0.781	0.630	0.417	0.226	0.189
10.2 V	20.8	16.81	11.88	9.00	7.44	5.56	3.94	3.13	2.10	1.63	1.23	0.944	0.775	0.625	0.413	0.226	0.188
10.5 V	18.5	15.06	11.00	8.38	7.06	5.44	3.88	3.06	2.06	1.58	1.21	0.938	0.769	0.618	0.411	0.225	0.188
10.8 V	15.6	13.31	9.81	7.81	6.88	5.25	3.81	3.00	2.00	1.50	1.19	0.925	0.750	0.608	0.406	0.224	0.186


Charging Method

Trickle use	Control voltage: 13.6 - 13.8 V; Initial current: 0,675 A or smaller
-------------	---


Cut off voltage

Discharge current	0.225 A - 0.9 A	0.9 A - 2.25 A	2.25 A - 4.5 A	4.5 A - 9 A	9 A - 13.5 A
Cut off voltage (V)	10.5	10.2	9.9	9.3	8.7


Influence of Temperature on Trickle life

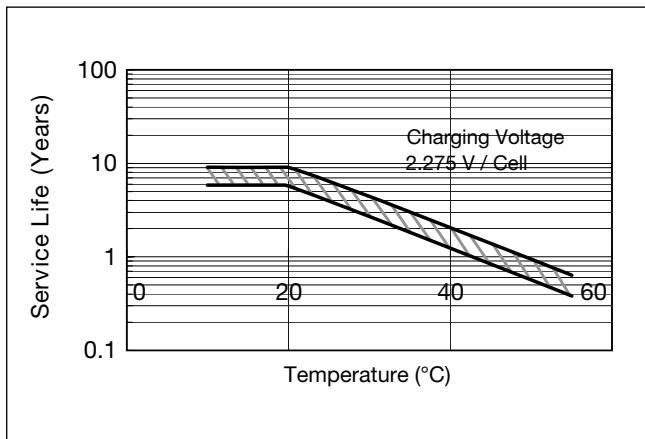


Residual capacity vs storage period

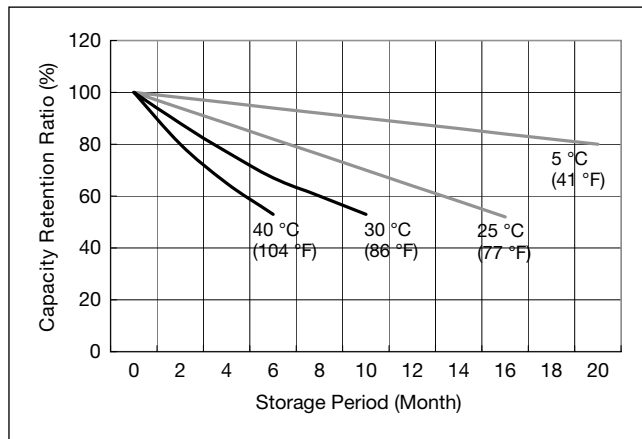

Constant-voltage and constant-current charge characteristics for Trickle use

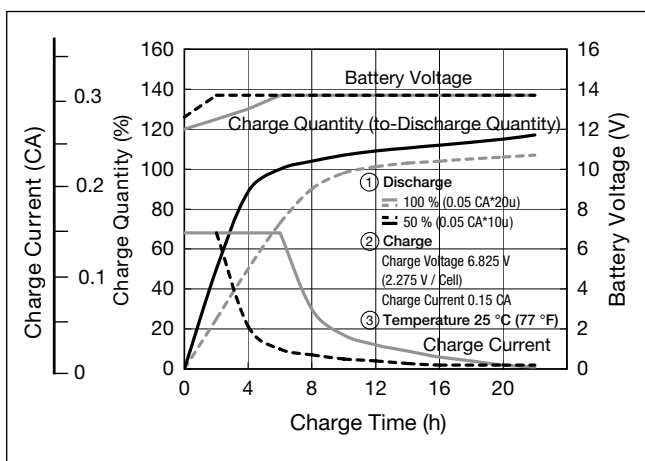

Discharge capacity by temperature and by discharge current

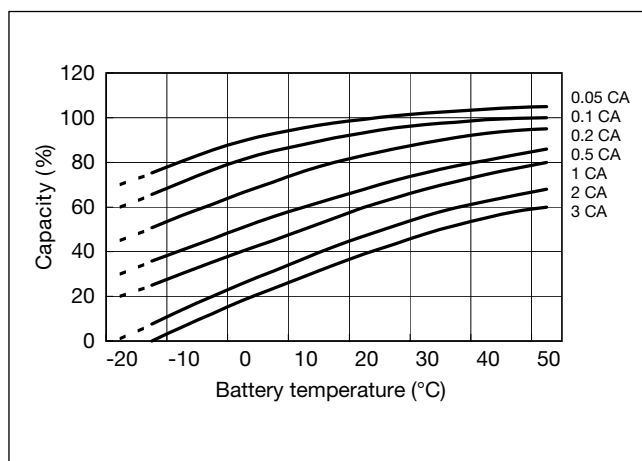

Discharge characteristics

