


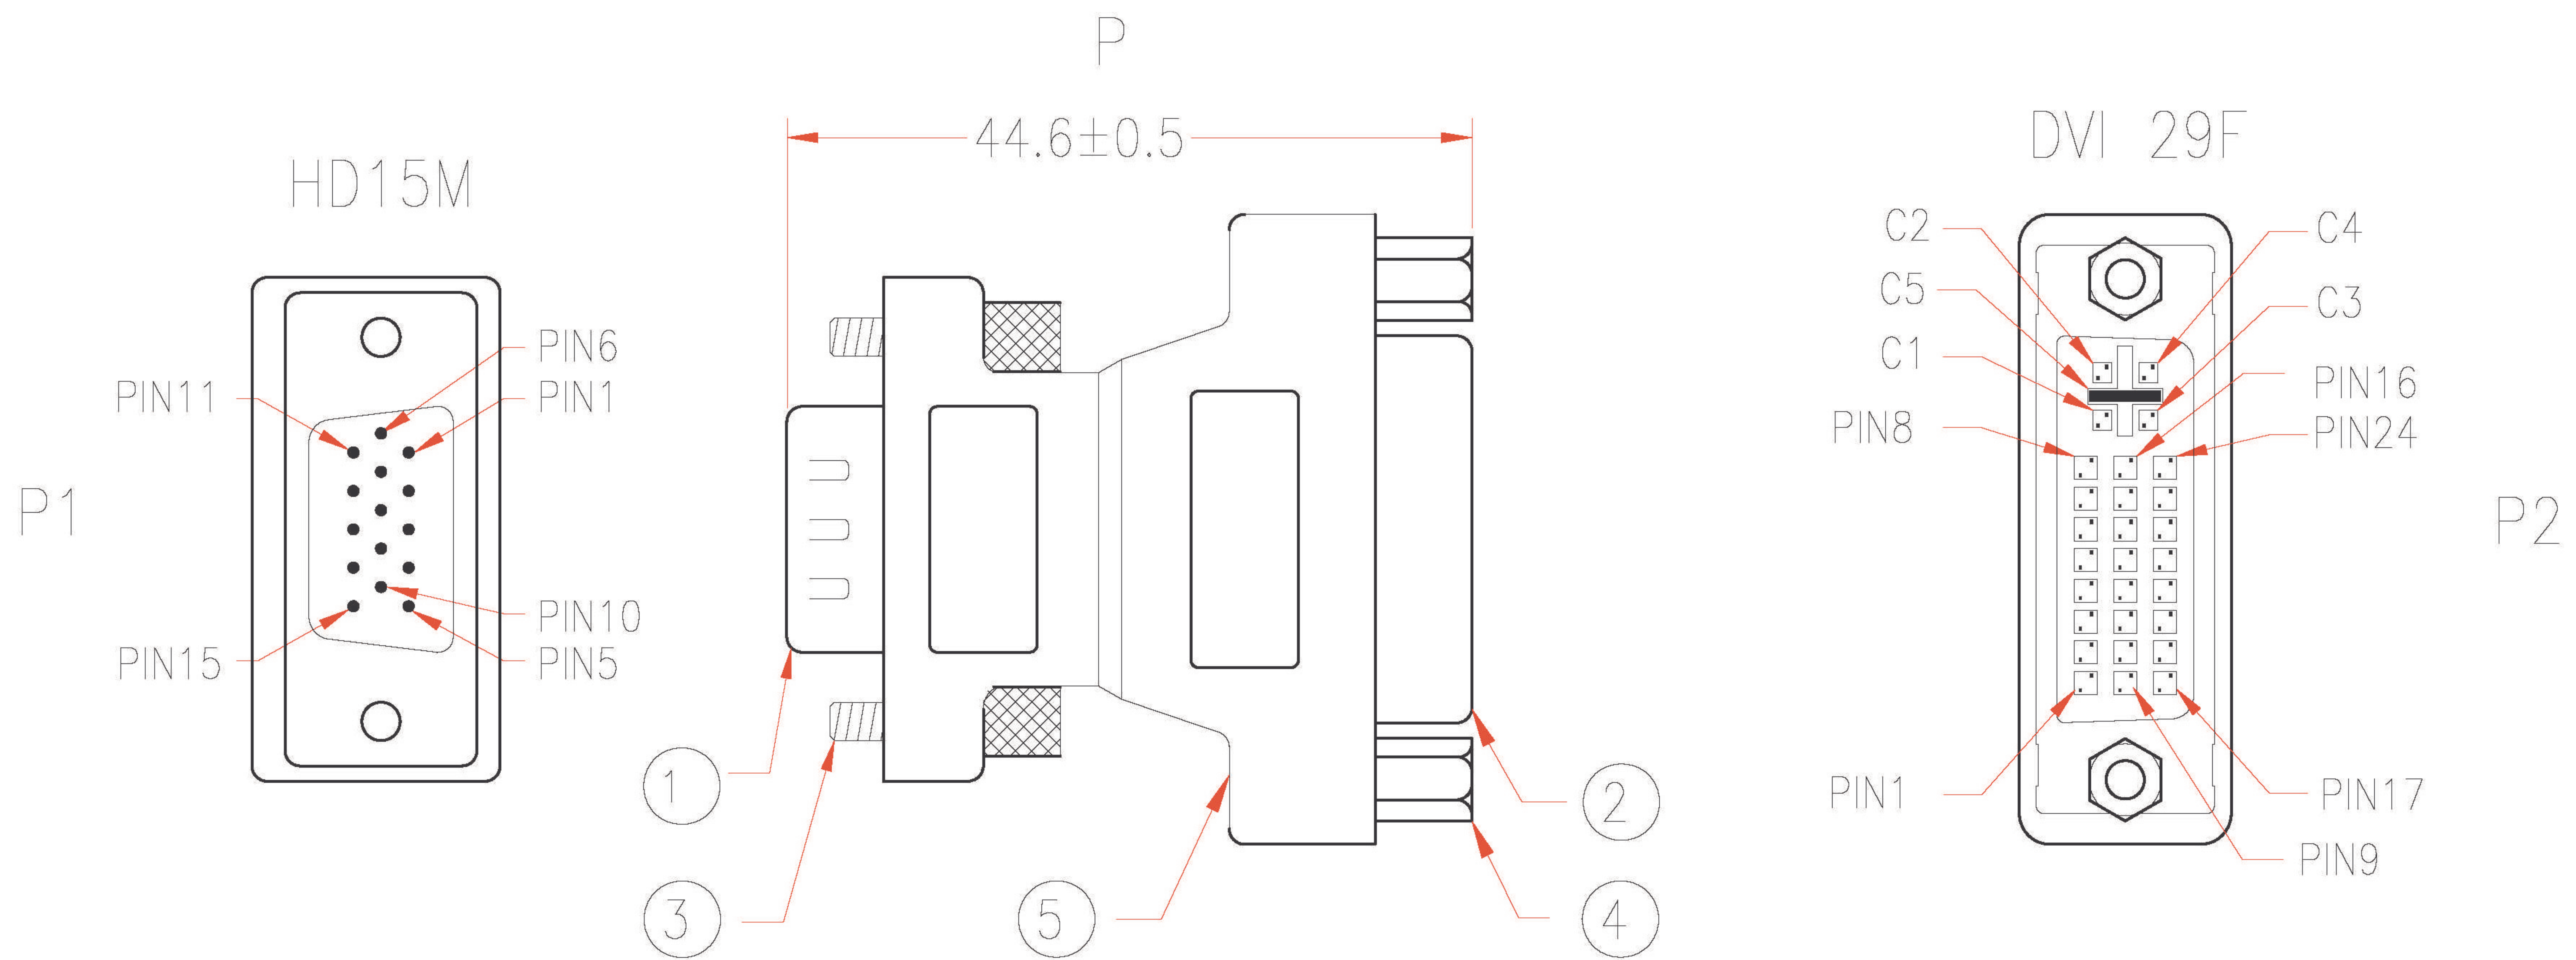

P1		P2
1	—————	C1
2	—————	C2
3	—————	C3
5	└──┬──┘	15
10	└──┬──┘	
6	└──┬──┘	
7	└──┬──┘	C5
8	└──┬──┘	
9	└──┬──┘	14
	└──┬──┘	16
12	—————	7
13	—————	C4
14	—————	8
15	—————	6

* NOTE:All relevant materials are complied with RoHS directive.

5	UL1061 26AWG INSULATOR WIRE, LENGTH 28mm	11
	COPPER FOIL 20*60mm	1
	MOLDED PE COLOR TRANSPARENT	
	MOLDED PVC BEIGE	
4	HEX-NUT 4.75*10mm	2
3	SCREW #4-40, 4.5*15mm	2
2	DVI 29 FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR	1
1	HD15 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1
No.	DESCRIPTION	Q'TY

Cable Length
Unless Other Spec.
Tolerances:
0 ~200mm ±10mm
201~1000mm ±20mm
1001 ~1500mm ±25mm
1501~2100mm ±30mm
2100mm↑ ±40mm

UNIT:mm