

SPECIFICATION:

Current rating:	3 A
Voltage rating:	250 V
Insulation resistance:	1000 MΩ min.
Contact resistance:	20 mΩ max.
Dielectric voltage:	1000 V AC
Operation temperature:	-25 °C to +85 °C

RoHS
COMPLIANT

MATERIAL:

Housing:	Nylon 66 beige UL94V-2
Contacts:	Brass
Wiring cable:	UL1007-24AWG 30cm

FINISH:


Contacts:	Tin plated
-----------	------------

HANDLING:

Packing:	Bulk
----------	------

TOLERANCE:

.X	± 0.10
.XX	± 0.05

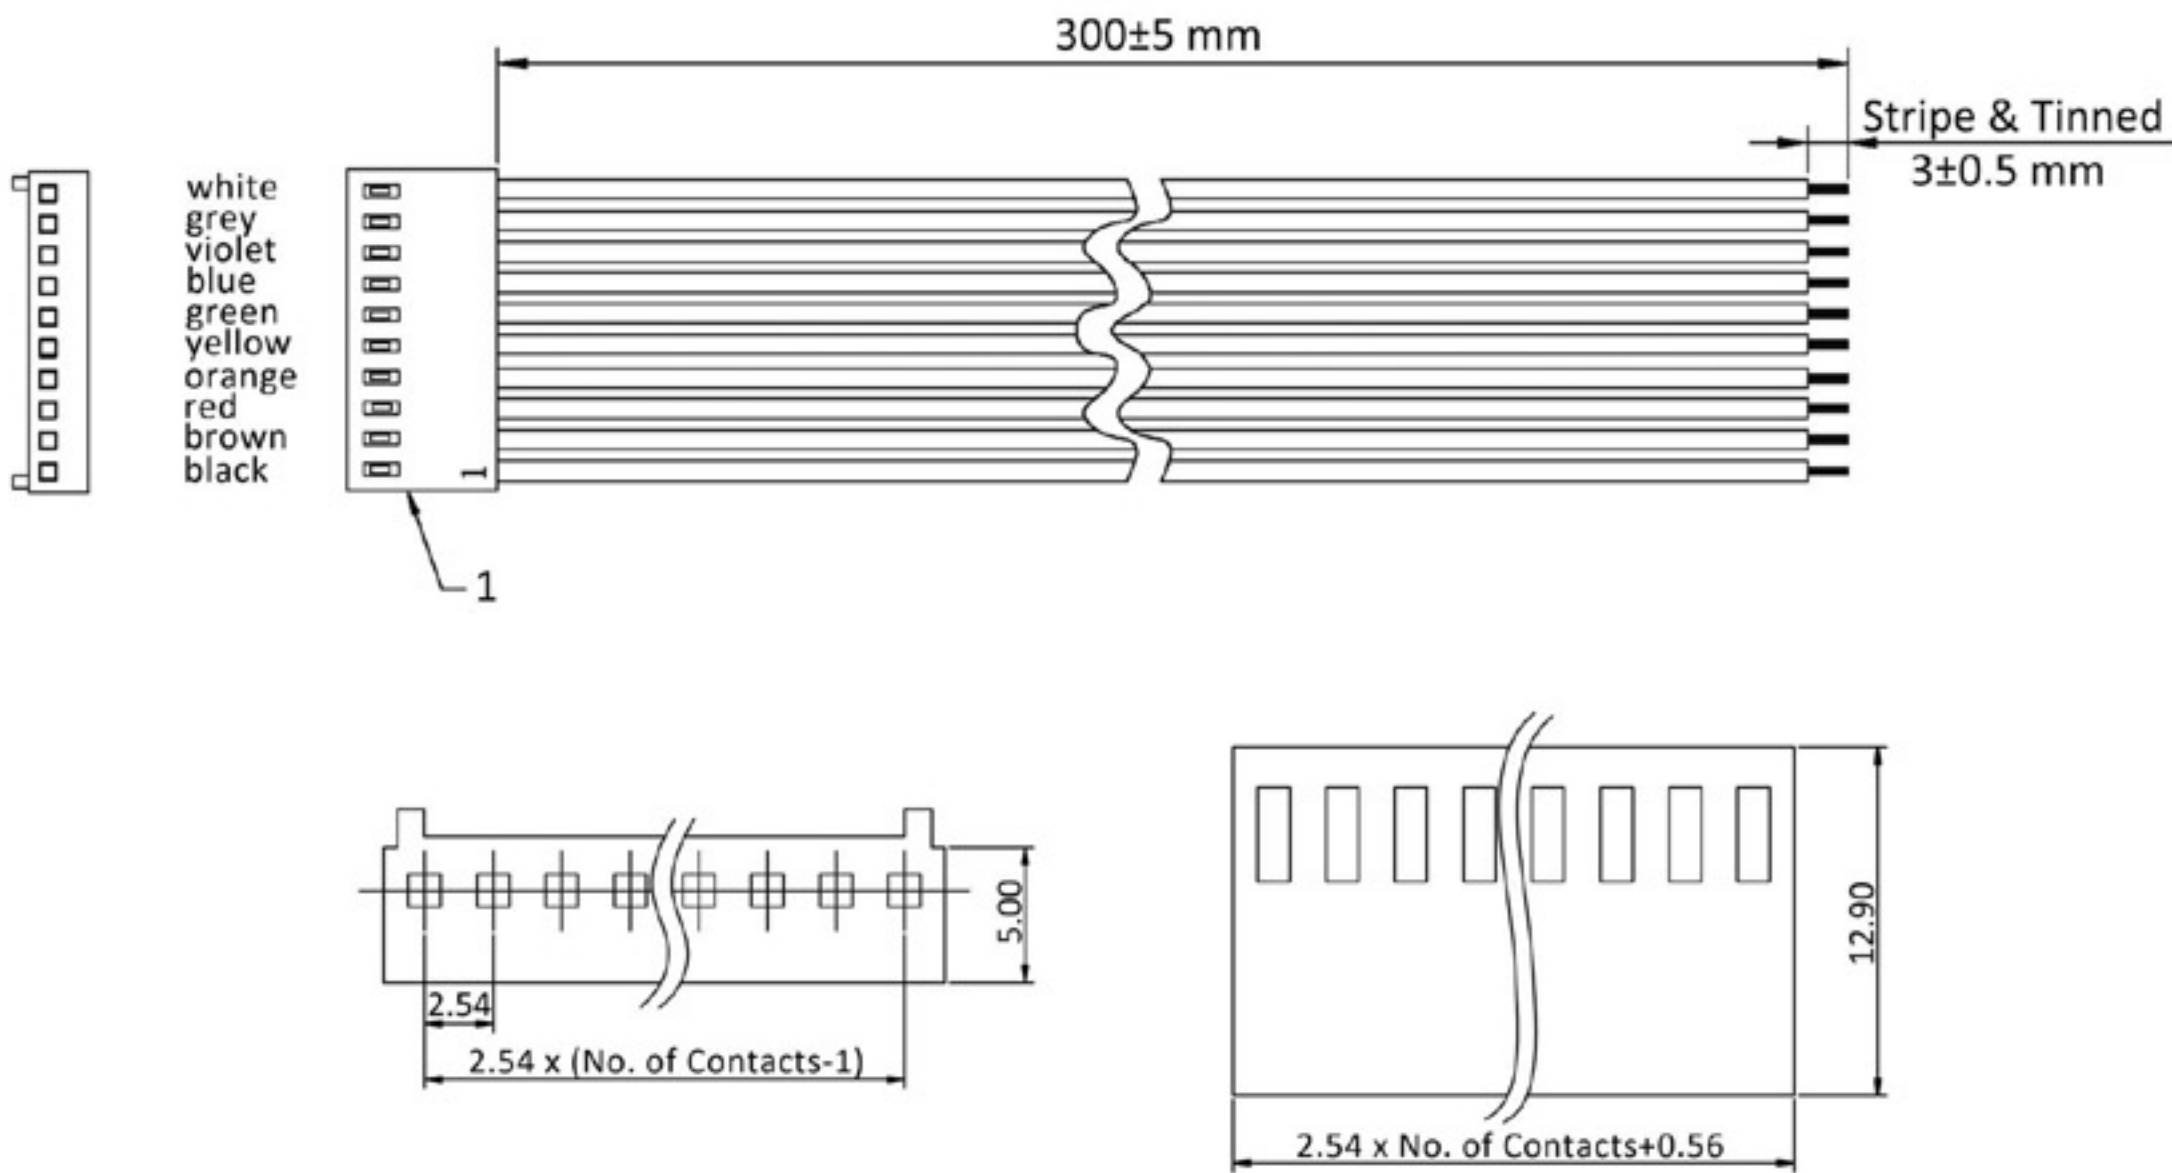

Identifier:	No. of contacts:
Connectors Series CV Pitch 2.54 mm with fixed wiring cable	#
	2: 1 x 2
	3: 1 x 3
	4: 1 x 4
	5: 1 x 5
	6: 1 x 6
	8: 1 x 8
	10: 1 x 10
	20: 1 x 20