


DS6003 – Druknop enkelpolig – 19mm – waterdicht - INOX


- 19 mm diameter
- Switch rating: 5A/250VAC
- Configuratie: 1NO1NC
- INOX
- IP 67

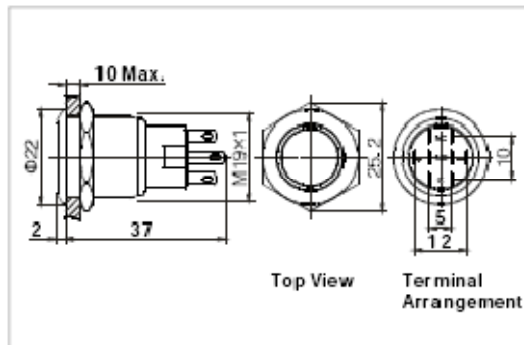

The Front Shape		Flat Round
Terminal Type		Pin Terminal (2.8 × 0.5mm)
Switching		No.3
Max. Switch Rating		Ith: 5A Ui:250VAC
Contact Resistance		≤50mΩ
Insulation Resistance		≥1000MΩ
Dielectric Strength		2000VAC
Operating Temp		-20℃ ~ +55℃
Mechanical life		1,000,000 cycles
Electrical life		50,000 cycles
Panel Thickness		1 ~ 10mm
Torque		5 ~ 14Nm
Operation Pressure		3~5N
Operation Distance		About 3.1mm
IP Degree		IP67
Material	Contact	Silver Alloy
	Button	Stainless Steel
	Body	Stainless Steel
	Base	PBT

DS6003 – Drukknop enkelpolig – 19mm – waterdicht - INOX

- 19 mm diameter
- Switch rating: 5A/250VAC
- Configuratie: 1NO1NC
- INOX
- IP67

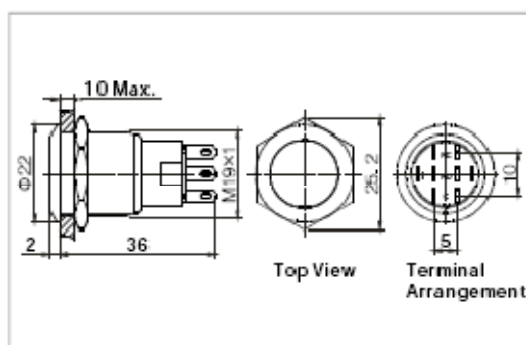

The Front Shape		Flat Round
Terminal Type		Pin Terminal(2.8×0.5mm)
Switching		No.3
Max. Switch Rating		Ith:5A Ui:250V AC
Contact Resistance		≦ 50mΩ
Insulation Resistance		≧ 1000MΩ
Dielectric Strength		2000VAC
Operating Temp		-20℃ ~ +55℃
Mechanical life		1,000,000 cycles
Electrical life		50,000 cycles
Panel Thickness		1 ~ 10mm
Torque		5 ~ 14 Nm
Operation Pressure		3~5N
Operation Distance		About 3.1mm
IP Degree		IP67
Material	Contact	Silver Alloy
	Button	Stainless Steel
	Body	Stainless Steel
	Base	PBT