


Easy Entry Insulated Pin Terminal

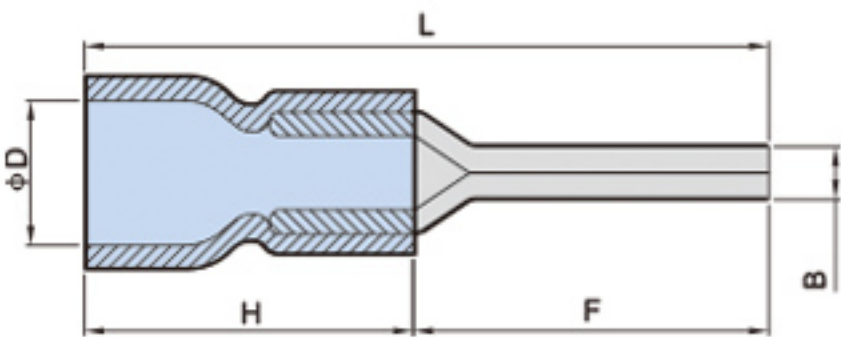

Cable size:0.5~1.5mm² (A.W.G. 22-16) **max current:** I_{max}=19A **material:** copper **Insulating material:** vinyl. nylon **thickness:** 0.75mm
导线截面0.5~1.5mm² (美国线规22-16) **最大电流:** I_{max}=19A **材质:** 紫铜 **材料厚度:** 0.75mm

ITEM NO 型 号	Dimension尺寸(mm)				Color颜色
	F	L	H	D φ	
KDR1 , 9	1.9	19.0	10.0	4.3	Red
	1.9	20.0			
	1.9	22.0			
	1.9	23.0			
	1.9	28.0			

Cable size:1.5~2.5mm² (A.W.G. 16-14) **max current:** I_{max}=27A **material:** copper **Insulating material:** vinyl. nylon **thickness:** 0.8mm
导线截面1.5~2.5mm² (美国线规16-14) **最大电流:** I_{max}=27A **材质:** 紫铜 **材料厚度:** 0.8mm

ITEM NO 型 号	Dimension尺寸(mm)				Color颜色
	F	L	H	D φ	
KDB1 , 9	1.9	19.0	10.0	4.9	Blue
	1.9	20.0			
	1.9	22.0			
	1.9	23.0			
	1.9	28.0			

Cable size:4~6mm² (A.W.G. 12-10) **max current:** I_{max}=48A **material:** copper **Insulating material:** vinyl. nylon **thickness:** 1.0mm
导线截面4~6mm² (美国线规12-10) **最大电流:** I_{max}=48A **材质:** 紫铜 **材料厚度:** 1.0mm

ITEM NO 型 号	Dimension尺寸(mm)				Color颜色
	F	L	H	D φ	
KDY1 , 9	2.8	25.5	13.0	6.7	Yellow
	2.8	30.5	13.0	6.7	