


Insulated Male Disconnect

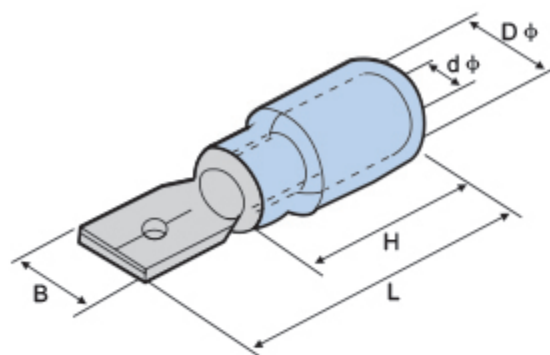

Cable size: 0.5~1.5mm²(A.W.G.22-16)

导线截面 0.5~1.5mm²(美国线规22-16)

max current: I_{max} =10A

最大电流: I_{max}=10A

material: Brass

材质: 黄铜

Insulating material: vinyl. nylon

ITEM NO 型 号	Nema Tab (mm)	Thickness of material 材料厚度	Dimension尺寸(mm)					Color 颜色
			B	d φ	D φ	L	H	
KMR2 , 8M	0.5×2.8	0.5	2.8	1.7	4.3	17.7	10.0	Red
	0.8×2.8	0.8	2.8	1.7	4.3	17.7	10.0	
	0.5×4.75	0.5	4.75	1.7	4.3	20.0	10.0	
	0.8×4.75	0.8	4.75	1.7	4.3	20.0	10.0	
KMR6 , 3M	0.8×6.35	0.4×2	6.35	1.7	4.3	21.0	10.0	

Cable size: 1.5~2.5mm²(A.W.G.16-14)

导线截面 1.5~2.5mm²(美国线规16-14)

max current: I_{max} =15A

最大电流: I_{max}=15A

material: Brass

材质: 黄铜

Insulating material: vinyl. nylon

ITEM NO 型 号	Nema Tab (mm)	Thickness of material 材料厚度	Dimension尺寸(mm)					Color 颜色
			B	d φ	D φ	L	H	
KMB6 , 3M	0.5×4.75	0.5	4.75	2.3	4.3	20.0	10.0	Blue
	0.8×4.75	0.8	4.75	2.3	4.3	20.0	10.0	
	0.8×6.35	0.4×2	6.35	2.3	4.3	21.0	10.0	

Cable size: 4~6mm²(A.W.G.12-10)

导线截面 4~6mm²(美国线规12-10)

max current: I_{max} =24A

最大电流: I_{max}=24A

material: Brass

材质: 黄铜

Insulating material: vinyl. nylon

ITEM NO 型 号	Nema Tab (mm)	Thickness of material 材料厚度	Dimension尺寸(mm)					Color 颜色
			B	d φ	D φ	L	H	
KMY6 , 3M	0.8×6.35	0.4×2	6.35	3.4	5.7	25.0	13.0	Yellow