


Fully Insulated Female Disconnecter

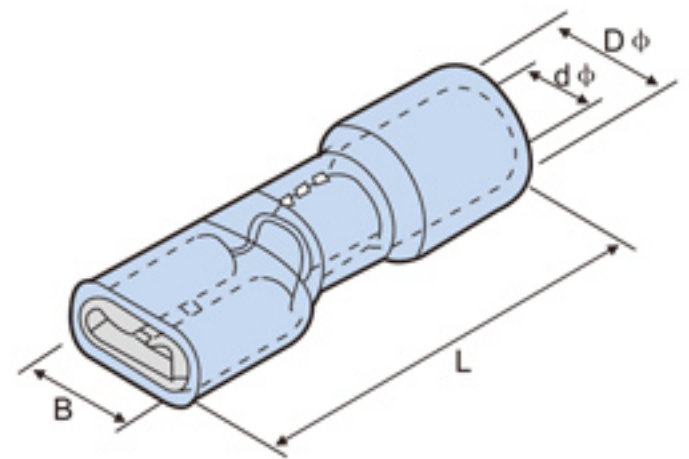

Cable size: 0.5~1.5mm²(A.W.G.22-16) max current: I_{max} =10A material: Brass
导线截面 0.5~1.5mm² (美国线规22-16) 最大电流: I_{max}=10A 材质: 黄铜

ITEM NO 型 号	Nema Tab (mm)	Dimension尺寸(mm)			
		B	D φ	d φ	L
KMR6 , 3 I	0.5×4.75	5.6	3.8	1.7	20.0
	0.8×4.75	5.6	3.8	1.7	20.0
	0.8×6.35	7.4	3.8	1.7	21.5

Cable size: 1.5~2.5mm²(A.W.G.16-14) max current: I_{max} =15A material: Brass
导线截面 1.5~2.5mm² (美国线规16-14) 最大电流: I_{max}=15A 材质: 黄铜

型 号 ITEM NO	Nema Tab (mm)	尺寸Dimension(mm)			
		B	D φ	d φ	L
KMB6 , 3 I	0.5×4.75	5.6	4.3	2.3	20.0
	0.8×4.75	5.6	4.3	2.3	20.0
	0.8×6.35	7.4	4.3	2.3	21.5