

housing


87H391X1M



technical data

housing

insulator : nylon 66
flammability : see drawing



available pole no.: 02 to 15
flammability: UL 94V-0

terminal

87C39FM-R50


female



technical data

terminal

AWG : see drawing
contact material : brass or phosphor bronze
packing : reel

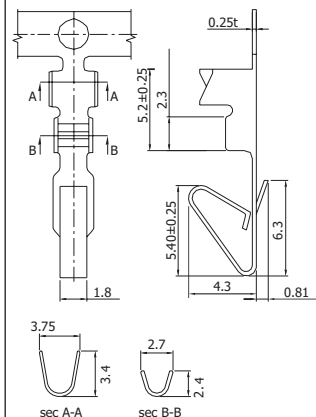

packing unit: 6,000 pcs
AWG: #18 - #22
mates with: 87H391X1M

electrical data

dielectric withstanding : 1500V AC / 1 min.
current rating : 7A max
insulation resistance : 1000 Meg Ohm min
contact resistance : 10 milli Ohm max
operating temperature : -40°C to +105°C

plating

50= tin

possible packing

L= loose
R= reel

order code

housing -	06 -	L	
terminal -		R	50
series-no.	poles	packing	plating

other dimensions / materials are available, please contact us