


Insulated Spade Terminal

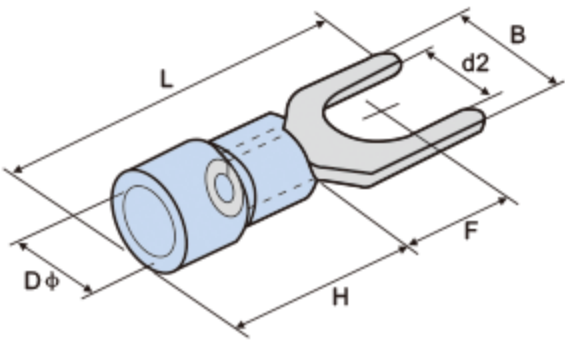

Cable size:0.5~1.5mm²(A.W.G.22~16) **max current:** I_{max}=19A **material:** copper **Insulating material:** vinyl. nylon **thickness:** 0.75mm
导线截面:0.5~1.5mm²(美国线规22~16) **最大电流:** I_{max}=19A **材质:** 紫铜 **材料厚度:** 0.75mm

ITEM NO 型号	USA screw 美制螺栓号	Screw dia. 螺栓口直径 d2(mm)	Dimension尺寸(mm)					Color 颜色
			B	L	F	H	Dφ	
KVR3	#4	3.2	5.7	21.5	6.5	10.5	4.3	
KVR3 , 5	#6	3.7	5.7	21.5	6.5			
	#6	3.7	6.4	21.5	6.5			
	#8	4.3	6.4	21.5	6.5			
KVR4	#8	4.3	7.2	21.5	6.5			
	#8	4.3	8.1	21.5	6.5			
	#8	4.3	8.1	21.5	6.5			
KVR5	#10	5.3	8.1	21.5	6.5			
	#10	5.3	9.5	21.5	6.5			
KVR6	1 / 4	6.4	9.5	21.5	6.5			
	1 / 4	6.4	12.0	27.2	11.0			

Cable size:1.5~2.5mm²(A.W.G.16~14) **max current:** I_{max}=27A **material:** copper **Insulating material:** vinyl. nylon **thickness:** 0.8mm
导线截面:1.5~2.5mm²(美国线规16~14) **最大电流:** I_{max}=27A **材质:** 紫铜 **材料厚度:** 0.8mm

ITEM NO 型号	USA screw 美制螺栓号	Screw dia. 螺栓口直径 d2(mm)	Dimension尺寸(mm)					Color 颜色
			B	L	F	H	Dφ	
KVB3	#4	3.2	5.7	21.5	6.5	10.5	4.9	
KVB3 , 5	#6	3.7	5.7	21.5	6.5			
	#6	3.7	6.0	21.5	6.5			
	#8	4.3	6.4	21.5	6.5			
KVB4	#8	4.3	7.2	21.5	6.5			
	#8	4.3	7.9	21.5	6.5			
	#8	4.3	7.9	21.5	6.5			
KVB5	#10	5.3	8.1	21.5	6.5			
	#10	5.3	9.5	21.5	6.5			
KVB6	1 / 4	6.4	9.5	21.5	6.5			
	1 / 4	6.4	12.0	21.5	11.0			