

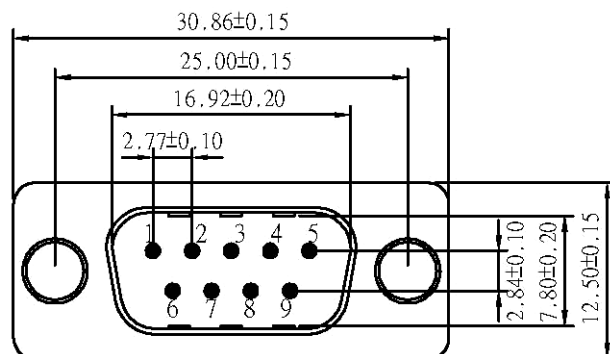
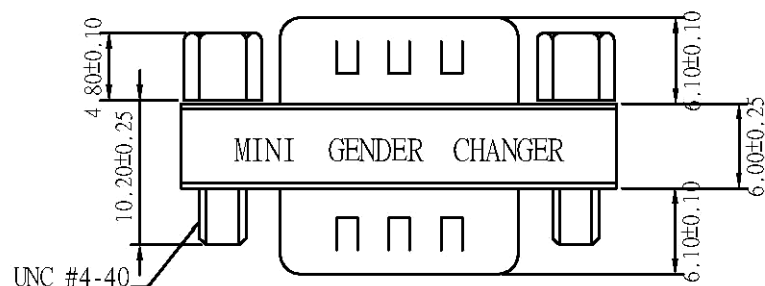


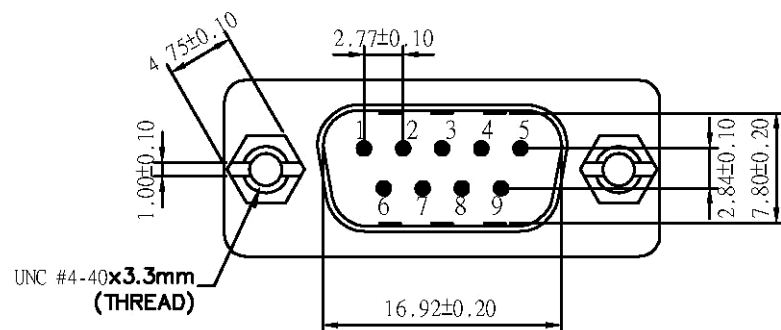

UNC #4-40 Hexscrew



DGC 09 M/M GENDER CHANGER

PIN OUT: 9Male

9Male

1	-----	1
2	-----	2
	~	
8	-----	8
9	-----	9
G	-----	G

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 VO Blue

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one Minute

INSULATOR RESISTANCE: 1000M Ω min at 500V DC

TEMPERATURE: -55°C → 105°C