Laboratory & Measuring Connectors Laboratory

Panel Mount Sockets 4 mm, insulated lead-in, with soldered nose



SPECIFICATION:

 $\begin{array}{lll} \mbox{Operating Voltage (Max.):} & 60 \mbox{ Vdc} \\ \mbox{Operating Current (Nom.):} & 24 \mbox{ A} \\ \mbox{Operating Temperature:} & -20 \mbox{°C to } 90 \mbox{°C} \\ \mbox{Insulation Resistance (Min.):} & 500 \mbox{ M}\Omega \\ \mbox{Contact Resistance (Max.):} & 5 \mbox{ m}\Omega \end{array}$

MATERIAL:

Material (Terminal): brass, nickel plated

Material (Housing): ABS


Material (Contact Area): brass, nickel plated

HANDLING:

Terminal: solder
Packaging: bulk
PU: 500 piece(s)





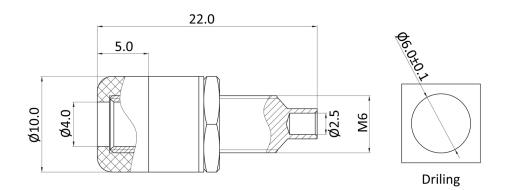

Order Information

Identifier:	Colour:
TB40	#
Telephone socket 4.0 mm	SW: black
	RT: red
	BL: blue
	GE: yellow
	GN: green

WS: white