



cross-sections and diameters, as well as regarding the available assembly instructions.



in our full range of stranded cables, please order the main catalog "Cables and Multistrand Wires".

Solder connection.

SLS205-X

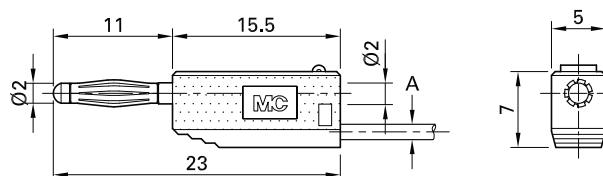

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors
22.2616-*	SLS205	30 VAC / 10 A 60 VDC / 10 A	<div><div>PVC</div><div>TPE</div> Ø 2.1 mm</div>	0.5 mm²	<div>Au</div> <div>2122</div>
22.2617-*	SLS205-X	30 VAC / 10 A 60 VDC / 10 A	<div><div>PVC</div><div>TPE</div> Ø 2.1 mm</div>	0.5 mm²	<div>Ni</div> <div>212223</div>

22.2030-*	KT205	Insulator
22.1004	LS205	Plug for SLS205
22.5006	LS205N	Plug for SLS205-X



www.staubli.com/electrical



Optional colors

Further information, page 6