

SPECIFICATION:

Current rating:	1.5 A
Insulation resistance:	1000 MΩ min.
Contact resistance:	20 mΩ max.
Dielectric voltage:	1000 V AC
Operation temperature:	-40 °C to +70 °C

MATERIAL:

Housing:	Polycarbonate UL94V-2
Contacts:	Phosphorbronze




FINISH:

Contacts:	Gold Flash
-----------	------------


HANDLING:

Packing:	Bulk
----------	------


RoHS
COMPLIANT

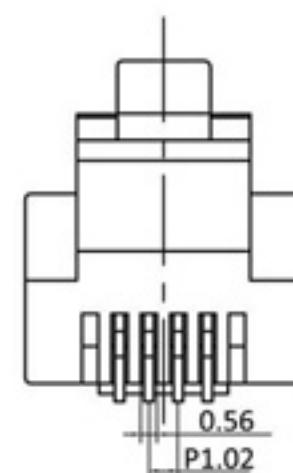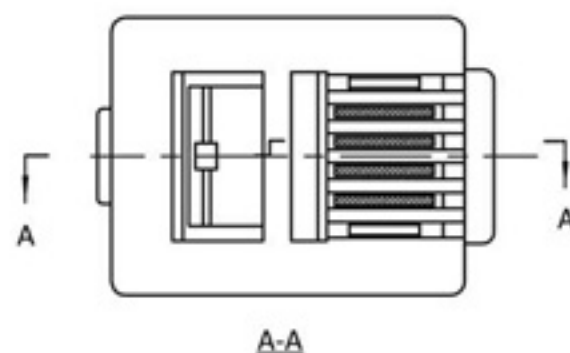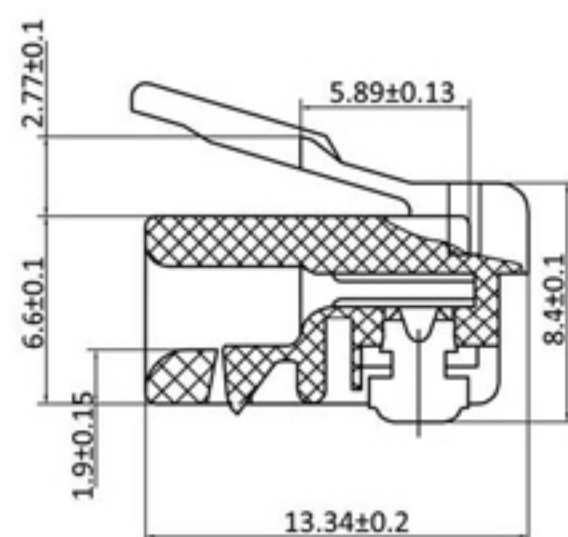



MPL64

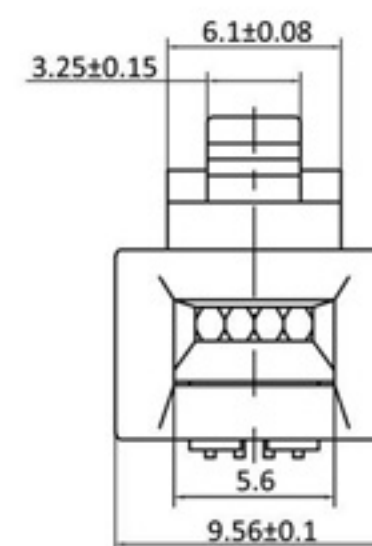


Flat Cable

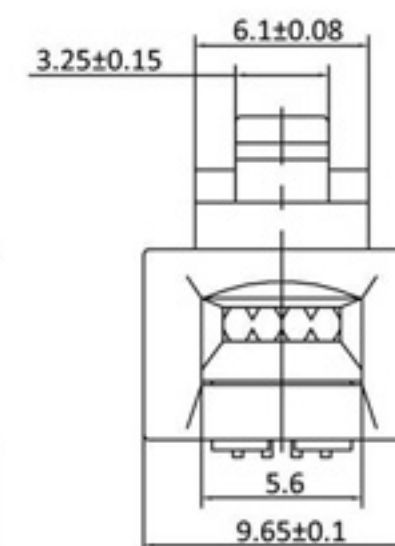


Round Cable

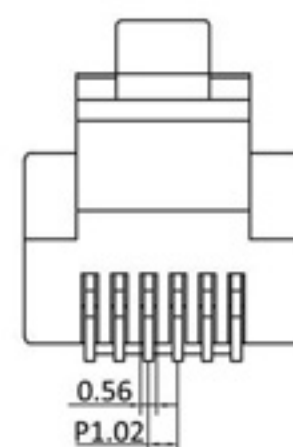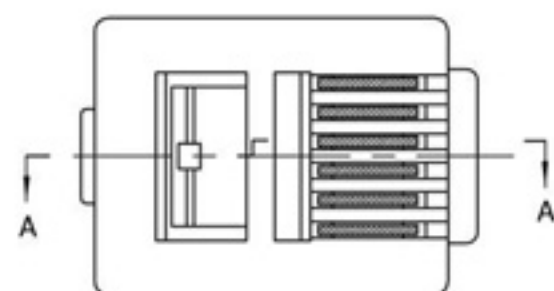

MPL66

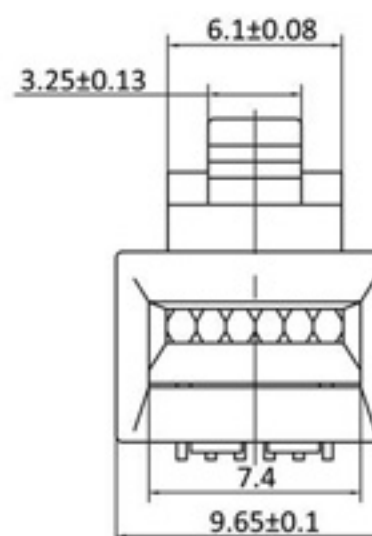

Flat Cable

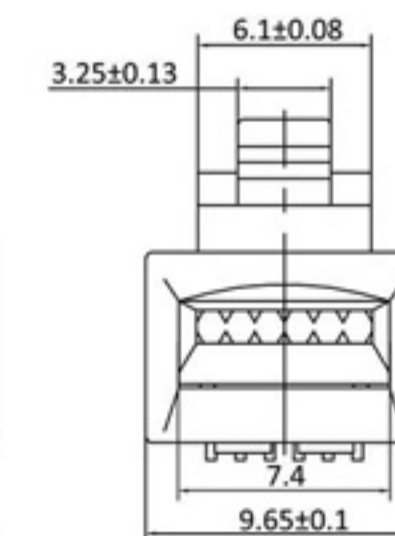

Round Cable