

SPECIFICATION:

Current rating:	1.5 A
Insulation resistance:	500 MΩ min.
Contact resistance:	40 mΩ max.
Dielectric voltage:	1000 V AC
Operation temperature:	0 °C to +80 °C



MATERIAL:

Housing:	PBT UL94V-0
Contacts:	Phosphorbronze
Solder pins:	Phosphorbronze

FINISH:


Contacts:	Gold over nickel
Solder pins:	Tin over nickel

HANDLING:

Processing:	Wave soldering
Packing:	Tray

TOLERANCE:

.X	± 0.38
.XX	± 0.25

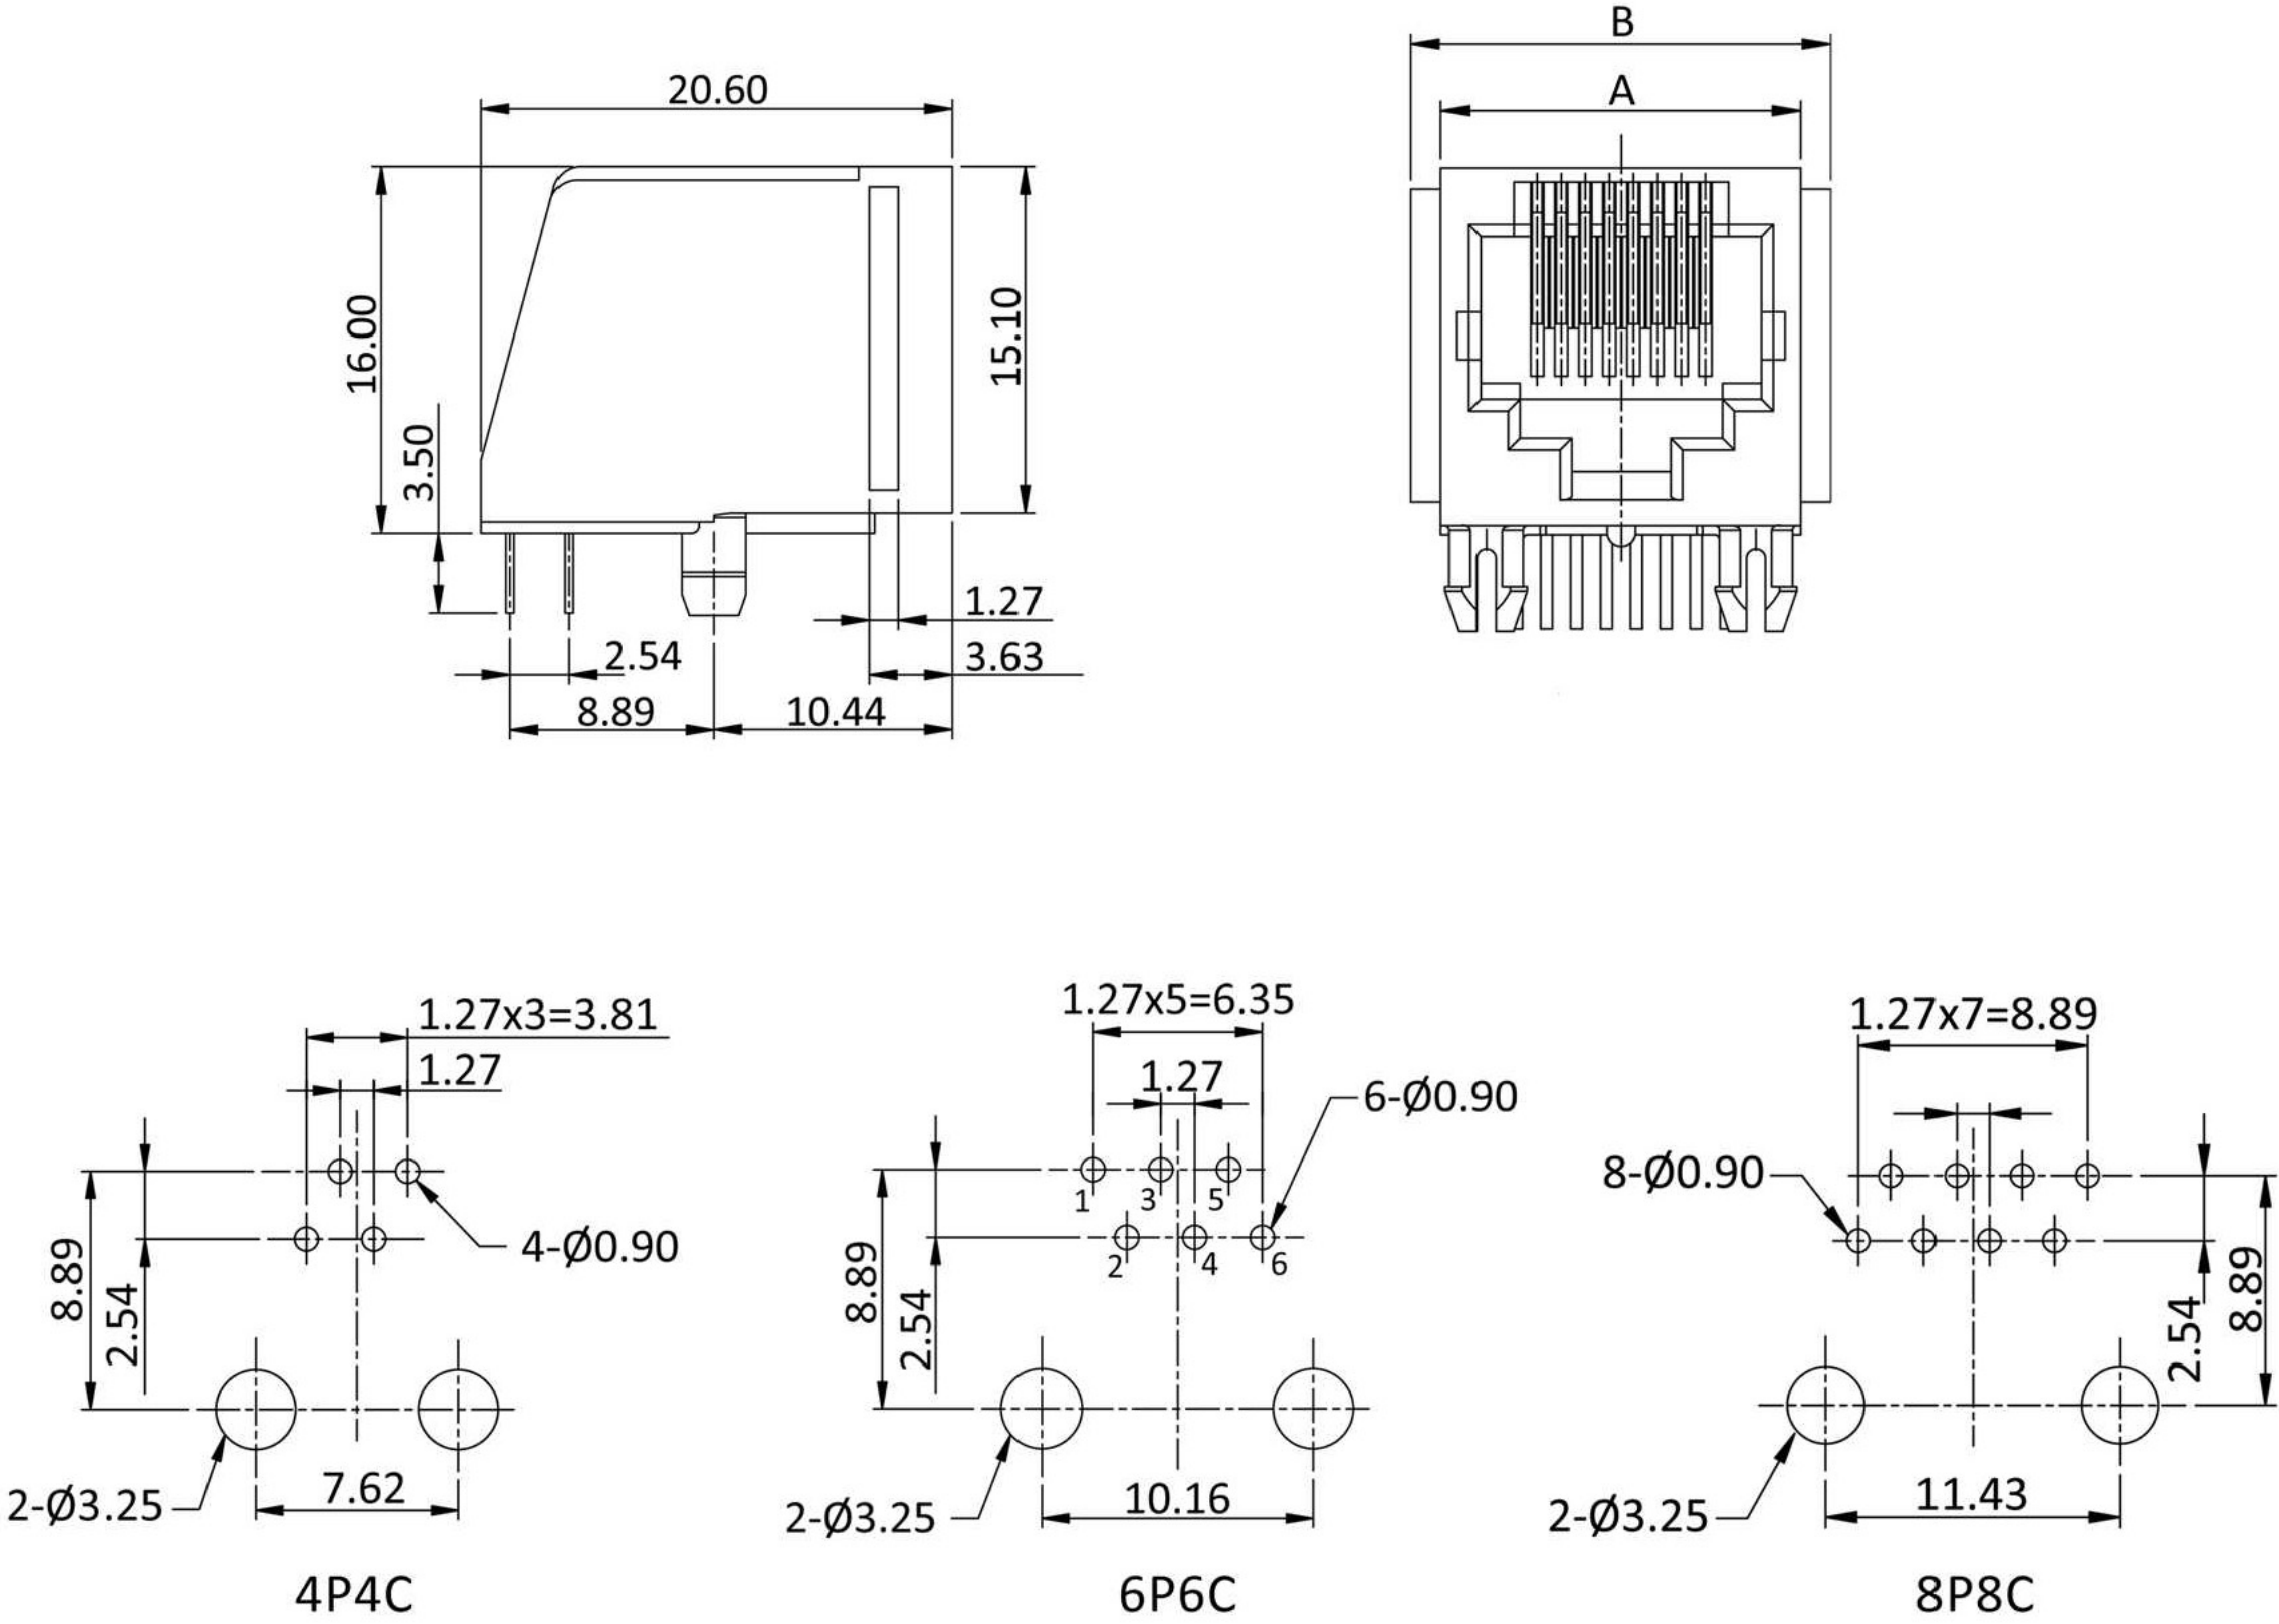

Dimensions

Positions:	A	B
4	11.18	13.72
6	13.21	15.75
8	15.24	17.78