


Insulated Ring Terminal

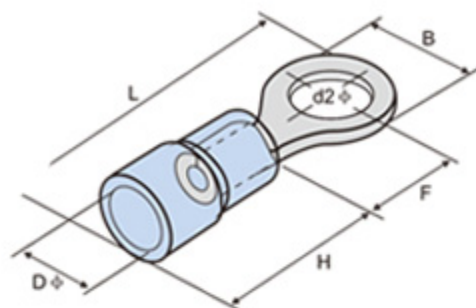

Cable size: 0.5~1.5mm² (A.W.G.22~16) max current: I_{max}=19A material: copper Insulating material: vinyl. nylon thickness: 0.75mm

ITEM NO 型号	USA screw 美制螺栓号	Screw dia. 螺栓口直径 (mm)	Dimension 尺寸(mm)					Color 颜色
			B	L	F	H	D ϕ	
KOR3	#4	3.2	5.7	17.8	4.95	10.5	4.3	
KOR3, 5	#6	3.7	5.7	17.8	4.95			
	#6	3.7	6.6	20.1	6.3			
KOR4	#6	4.3	8.0	21.5	7.0			
	#8	4.3	6.6	20.1	6.3			
	#8	4.3	8.0	21.5	7.0			
KOR5	#10	5.3	8.0	21.5	7.0			
	#10	5.3	9.8	23.0	7.8			
KOR6	1/4	6.4	11.6	27.5	11.1			
KOR8	5/16	8.4	11.6	27.5	11.1			
	3/8	10.5	13.6	31.6	13.9			
	1/2	13.0	19.2	36.0	16.5			

Cable size: 1.5~2.5mm² (A.W.G.16~14) max current: I_{max}=27A material: copper Insulating material: vinyl. nylon thickness: 0.8mm

ITEM NO 型号	USA screw 美制螺栓号	Screw dia. 螺栓口直径 d2(mm)	Dimension 尺寸(mm)					Color 颜色
			B	L	F	H	D ϕ	
KOB3	#4	3.2	6.6	18.5	4.8	10.5	4.9	
	#6	3.7	6.6	18.5	4.8			
KOB4	#6	3.7	6.6	21.0	7.0			
	#6	3.7	8.5	22.0	7.75			
	#8	4.3	6.6	21.0	7.0			
	#8	4.3	8.5	22.0	7.75			
KOB5	#10	5.3	8.5	22.0	7.75			
	#10	5.3	9.5	22.0	7.25			
KOB6	1/4	6.4	12.0	27.6	11.0			
KOB8	5/16	8.4	12.0	27.6	11.0			
	3/8	10.5	14.6	31.0	13.9			
	1/2	13.0	19.2	36.0	16.5			