


# Compact fluorescent lamp Ralux® Duo

RX-D 26W/840/G24D

Radium

Product Datasheet Date: 24.06.2021

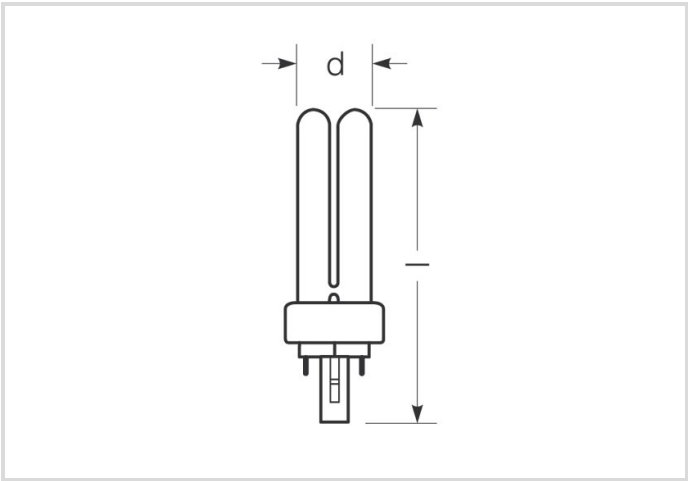

A



1800




4000K



10 000h

## General Data

Article No.	31316921
Code	RX-D 26W/840/G24D
Product EAN	4008597169212
Customs tariff no.	85393190
Box quantity (pcs.)	10
EAN Box	4008597569210
Gross weight of box in kg	0.578
Length of box in m	1.87
Width of box in m	0.88
Height of box in m	1.88
ETIM class	EC000087
ETIM class name	Compact fluorescent lamp without integrated ballast
Product status	 Active

## Electric Parameters

Lamp nominal wattage	26 W
Rated wattage	26.0 W
Energy Consumption kWh/1000h	31,35

Electric Parameters

Mains voltage	230 V
Compensation capacitor for 50Hz operation	3.2 µF

Light Application Parameters

Luminous flux	1800 lm
max. luminous flux at	25 °C
Luminous efficiency	69.23 lm/W
Radium light colour	white
Colour temperature	4000 K
Colour rendering index Ra	80-89
Mean luminance	5,5
Lumen maintenance at 2000h	0.85
Lumen maintenance at 4000h	0.78
Lumen maintenance at 6000h	0.76
Lumen maintenance at 8000h	0.75

Service Life

Average nominal lifespan	10000 h
Lamp survival factor at 2000h	0.99
Lamp survival factor at 4000h	0.99
Lamp survival factor at 6000h	0.95
Lamp survival factor at 8000h	0.81

Specification

Energylabel from 2013	A
Diameter	27 mm
Length max.	172 mm
Total length	172 mm
Mercury content	2.5 mg
Base	G24d-3

Miscellaneous

EU Directive	TIM
--------------	-----

# Compact fluorescent lamp Ralux® Duo

RX-D 26W/840/G24D

**Radium**

## Notes


Compact fluorescent lamp, light colour 840, high luminous efficiency, good colour rendering, long life, base G24q. Controllable by Dim-ECG.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

### Base




G24d  
IEC/EN 60061-1  
sheet 7004-78-5

### Spectrum


Natural daylight is a mixture of direct sunlight and the light of the sky. Therefore, its spectral composition changes permanently due to the changing time of day. The standardised light classification D65 corresponds to a daylight with a colour temperature of approximately 6500 K.

Every fluorescent lamp type has got an individual spectral power distribution according to its phosphor coating inside the bulb. From this result important properties light colour or colour rendering.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm) per 10nm.

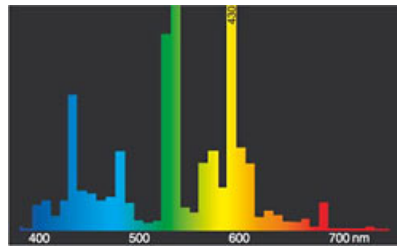

light colour 840 Spectralux® white (21)

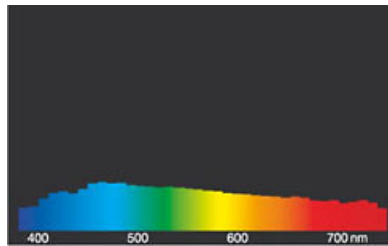

daylight(D 65)

### Special features



### General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

**All technical data without guarantee.**